



3M™ Digital Media System 800 For The Interwrite™ Board

Wall Mounting System:
Simple wall mounting system with built-in anti-theft features

Speaker System:
40 Watts of Stereo Surround Sound TruSurround XT® technology

Adjustable Arm:
For screen image sizes from 50 to 85 inches diagonal

Vikuit™ Super Close Projection:
Virtually eliminates distracting shadows

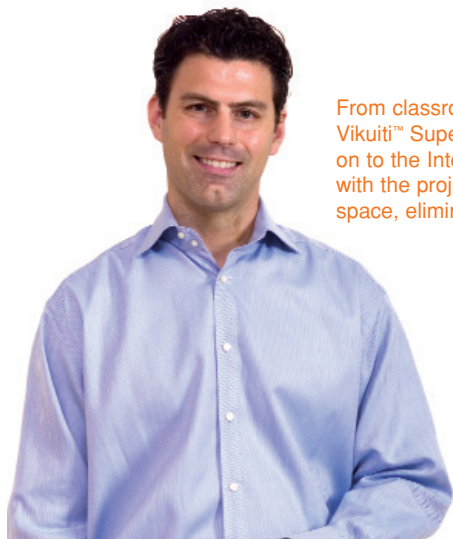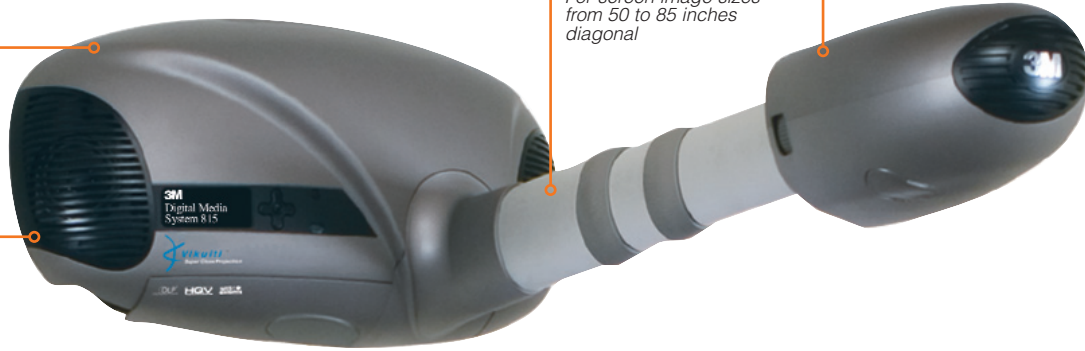


From classrooms to boardrooms, briefing rooms and beyond, the new 3M™ Digital Media System 800 Series with Vikuit™ Super Close Projection delivers memorable presentations. These wall-mounted systems project from above on to the Interwrite™ Board from a very short distance, virtually eliminating shadows and making it easier to interact with the projected image. The Digital Media System 800 Series allows for flexibility in room layout and opens up space, eliminating the need for carts or tables to hold equipment.



Space Saving Technology

Provides flexibility in room layout and opens up space, eliminating the need for carts or tables to hold projectors.

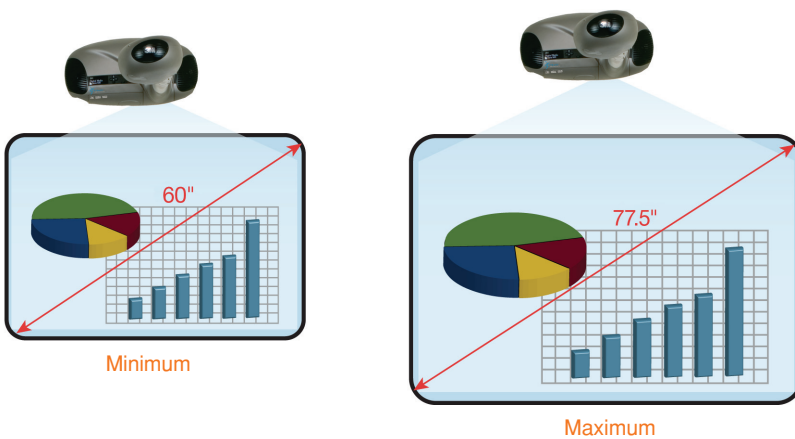

Connections

Computer

- 1 – VGA
- 1 – DVI-I /A (Analog/Digital)
- 2 – 3.5 mm Stereo Mini Jack
- 1 – USB A
- 1 – USB B
- 1 – Ethernet
- 1 – RS-232
- 1 – Audio out 3.5mm Stereo Mini Jack

Video

- 1 – Component
- 1 – Composite
- 1 – S-Video
- 2 – RCA Audio input

Key Features

- True XGA (1024 x 768) resolution
- Hollywood Quality Video (HQP™)
- Cable Control System included
- Virtually eliminates shadows and glare

In Partnership with



www.InterwriteLearning.com

866.496.4949

System Specifications

Brightness:	1500 ANSI lumens
Imager:	single 0.7" DLP™ imager
Resolution:	native XGA (1024 x 768); maximum SXGA (1280 x 1024)
Aspect ratio:	native 4:3, 16:9 supported
Colors:	16.7 million true colors (24 bit color)
Contrast ratio:	1300:1 (full on, full off)
Screen size (range):	50 – 85 inches diagonal
Image size adjustment:	Variable position telescoping arm with 118% offset
Focus:	Manual
Lens type:	Vikuiti™ Super Close Projection
Lamp type:	VIP 230W
Lamp life:	2000 hours (normal), 3000 hours (Eco mode)
Speakers:	built-in 2 x 20W Stereo Surround Sound TruSurround XT®
Computer compatibility:	VGA/SVGA/XGA/SXGA/Mac
Video compatibility:	NTSC/PAL/SECAM/SDTV/EDTV/HDTV
Horizontal sync frequency:	15 – 82 kHz
Vertical sync frequency:	50 – 85Hz
Keystone correction:	Horizontal +/- 30°; Vertical +/- 40°
Power requirements:	100 – 240 VAC, 50 – 60Hz
Regulatory approvals:	UL, cUL, TUV, CB, FCC class A, CISPR, EN60950
Compliance:	WEEE, RoHS
Operating temperature:	10°C to +35°C
Storage:	-30°C to +65°C
Operating altitude:	0 to 5000 ft., fan mode normal, 5C - 35C operating range; 5000 - 7000 ft., fan mode high, 5C - 35C operating range
Decibel level:	34 dB (32 Eco Mode)
Dimensions	WxHxD (D = arm in – arm out): 364 x 610 x 863-1317mm, 14.3 x 24.0 x 34.0 – 51.8 inches
Weight:	15 kgs, 33 lbs.
Warranty:	Limited 1 year, 90 days (500 hours) lamp

Features

- Picture-in-Picture
- Picture-and-Picture (side by side)
- Hollywood Quality Video – improves low quality video images
- Blank, Reveal, Freeze, Magnify on remote control
- Mouse emulation
- Custom image settings with auto save
- Control cable – facilitates easier connection of computers and video devices.
Includes on/off button
- Auto image synchronization when connecting
- 9 Language menu (English, French, German, Spanish, Italian, Japanese, Korean, Traditional Chinese, and Simplified Chinese)
- Virtually eliminates shadows and glare

Accessories Included

- 1 – VGA cable (3m)
- 1 – DVI to RGB cable (3m)
- 1 – Composite cable (3m)
- 1 – USB cable (3m)
- 1 – 3.5mm Stereo Mini cable (3m)
- 3 – Power cords (4.5m); (U.S., U.K., Europe)
- 1 – Remote control with batteries
- 1 – Wall mounting bracket with hardware and mounting template
- 1 – Control Cable

Optional Accessories

- 2nd Year Extended Warranty 78-6969-9896-8
- 3rd Year Extended Warranty 78-6969-9897-6
(must purchase 2nd Year Extended)
- Installation service 78-6969-9901-6
- Replacement lamp kit 78-6969-9880-2
- Replacement remote control 78-6969-9899-2



Control Cable

Important Notice

All statements, technical information, and recommendations related to 3M's products are on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

© 3M 2006 V072606

78-6970-8639-1 (12061.5)ii

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period stated on the packaging from the time of purchase. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

Specifications subject to change without notice.

3M, the 3M logo and the Vikuiti logo are trademarks of 3M Company. Used under license in Canada. DLP and the DLP logo are trademarks of Texas Instruments. SRS and the SRS symbol are trademarks or registered trademarks of SRS Labs, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.



www.InterwriteLearning.com
866.496.4949

Corporate Headquarters
7125 Riverwood Drive
Columbia, MD 21046
866.496.4949
410.381.6688 p
410.910.0051 f

European Headquarters
A Division of GTCO CalComp, GmbH
Kreiller Strasse 24
81673, Munich Germany
+49.89.370012.0 p
+49.89.370012.12 f